

OSM/LUM DECISION SHEET (DSH)

Standard(s) (incl. year)	Subclause(s)	Tracking No.	Year
EN 60598-2-3:2003/A1:2011 EN 60598-2-5:2015	3.6.5.1 5.6.8.1	DSH 2048A	2019
Category			
LITE			
Subject	Keywords	Developed by	Approved at
Luminaires for road and street lighting Floodlights	- Breakage test of glass - Position of centre punch - Line of the circle	OSM/LUM-ETF5	2019 ETICS Plenary Meeting


Question

According to the standards and sub clauses mentioned above the test shall be performed as follows by the use of glass that fractures into small pieces.

“For flat glass, the glass component is supported over the whole area to ensure that particles will not be scattered upon fragmentation and that movement of the particles is prevented. Shatter the glass with a centre punch at a point 30 mm from the mid-point of one of the longer edges of glass towards the centre.”

Where is the correct position of the centre punch?

Decision

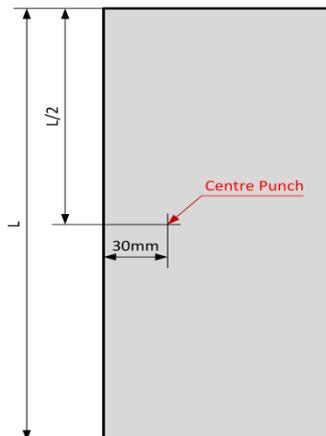

Explanatory notes
